

214

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 December 2000 (21.12.2000)

PCT

(10) International Publication Number
WO 00/76784 A1

(51) International Patent Classification⁷: B44F 1/12, B42D 15/10, 105/00, B41M 3/14

(74) Agent: FREEHILLS CARTER SMITH & BEADLE;
101 Collins Street, Melbourne, VIC 3000 (AU).

(21) International Application Number: PCT/AU00/00629

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(22) International Filing Date: 5 June 2000 (05.06.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PQ 0958 11 June 1999 (11.06.1999) AU

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): SECURENCY PTY. LTD. [AU/AU]; Hume Highway, Craigieburn, VIC 3064 (AU).


Published:
— With international search report.

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): ROMANIC, Hermina [AU/AU]; 1/243 Union Street, West Brunswick, VIC 3055 (AU). JACKSON, Wayne, Kevin [AU/AU]; 69 Darebin Road, Reservoir, VIC 3073 (AU).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SECURITY DOCUMENT OR DEVICE HAVING AN INTAGLIO CONTRAST EFFECT

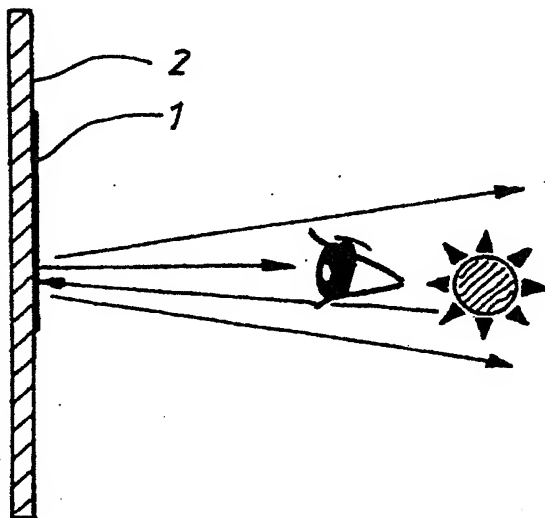

(57) Abstract: A security document or device having a substrate (2), a smooth highly reflective layer (1) applied to the substrate (2) and having a reflectivity of at least 60 gloss units, a raised printed image (3) of lines or dots applied to said reflective layer (1) by a printing process and having a height of about 10 to 100 μm , and typically about 30 μm , and a similar spacing being adjacent lines or dots, the hue chroma value of the ink used to print the image being between 30 and about 50 chroma units tending towards a saturation value of 60 chroma units, the lightness of the ink being at least 50 L degrees (lightness units), and typically between 70 and 100 L degrees.



WO 00/76784 A1

SECURITY DOCUMENT OR DEVICE HAVING AN INTAGLIO CONTRAST EFFECT

Field of the Invention

This invention relates to security documents such as passport, bonds,
5 banknotes, and security devices such as security passes and the like.

Background Of The Invention

The security industry is always looking for new manufacturing techniques,
materials and effects which offer improved and or additional security and which
will offer the "man on the street" greater assurance when exchanging such
10 documents while also offering an aesthetically appealing document that people will
look at.

Printed matter always has the problem of being copied or simulated by
photocopying or scanning devices as well as simple printing techniques widely
available in the commercial world. Therefore, devices that change colour or shape
15 under various lighting conditions and or geometry make the task of counterfeiting
or simulating the document much more difficult.

The introduction of the polymer security substrate has offered the perfect
medium to produce secure devices in a cost effective and secure manner. As most
high level security documents are already printed via the intaglio process, a well
20 known method of printing which uses elevated temperatures and high pressures, 70°
- 90°C at 25 - 30 Mpa, the machines and special inks for this process are only sold
to bona fide security printers, which offers a degree of inherent security.

In our International Patent Application PCT/AU98/00046, we describe a
printed security document or device including a reflective or brightly coloured base
25 layer and a raised printed image applied to that layer by a printing process, at least
part of the raised printed image having a height of at least 5µm, the image being
enhanced by the reflective or brightly coloured layer when viewed at different
angles under different lighting conditions. Subsequent research on the effect
created by this arrangement has revealed that it is important for best results for the
30 base layer to be highly reflective and for the raised printed image to be printed in an
ink having predetermined chroma and lightness.

Summary of the Invention

The invention provides a security document or other device including a substrate, a smooth highly reflective layer applied to said substrate and having a reflectivity of at least 60 gloss units, and a raised printed image applied to said reflective layer by a printing process, at least part of said raised printed image
5 having a height of at least 10 μm , said printed image being printed using ink of a hue having a chroma value of at least 30 chroma units and/or a lightness of at least 50 lightness units.

By producing the printed image on a highly reflective layer as defined above,
10 the raised printed image is significantly enhanced when viewed at different angles and under different lighting conditions and is therefore able to produce in the document or device a security effect which is readily noticeable to the naked eye, will maintain its effectiveness for the life of the document and will satisfy the anti copy requirements of security documents such as banknotes.

15 The invention also provides a method of producing a security document or other device, including the steps of applying a smooth highly reflective layer to a substrate, said reflective layer having a reflectivity of at least 60 gloss units, and printing a raised printed image on the reflective layer, at least part of said raised printed having a height of at least 10 μm and being printed using ink of a hue
20 having a chroma value of at least 30 chroma units and/or lightness of at least 50 L degrees (lightness units).

The smooth highly reflective layer can be applied by printing as part of the gravure printing process used to print security documents and devices, such as banknotes. If desired, other printing processes, such as silk screen printing, may be
25 used to apply the layer. Alternatively, a substrate having the required reflectivity can be achieved by hot stamping of foil having the required reflectivity to the substrate.

Where the smooth highly reflective layer is applied by a printing process, it is applied in a manner which achieves a layer thickness of about 3 μm .

The layer is preferably restricted to a relatively small region or patch of the substrate defining the security document or other device to thereby define a specific security feature in the document or device.

The substrate is preferably a smooth substrate such as a laminated polymer material of the type used in the production of Australian banknotes, and manufactured and sold by the applicant under the trade mark GUARDIAN, or any other smooth surfaced polymer suitable for use in the production of security documents or devices. Although paper substrates are not as smooth as polymer substrates, acceptable results can be achieved by printing or laminating a reflective patch onto a paper substrate, which is then calendared by the subsequent intaglio printing process.

Where the smooth highly reflective layer is applied by printing, the ink used should incorporate selected pigments and binders which will enable the cured reflective surface to withstand chemical and physical attack over an extended period of time, comparable to the expected life of the document.

The printed image is preferably applied by intaglio printing, or although other known printing processes capable of producing raised lines or dots on the reflective layer may be used. The printed image will typically have an average height of about 10 μm to 100 μm , which is about the upper limit of the height which can be achieved using the intaglio printing process, a similar width, and a spacing or pitch between adjacent lines or dots should be in a ratio height to pitch of about 1:1 to 1:3. In a practical example, the lines/dots in the image will have a height of about of 20 to 30 μm , a similar width, and a pitch of about 30 μm .

The adoption of the ratio outlined above results in the reflective patch remaining reflective in nature when viewed with a light source from behind, and the patch will dominate the perception of the viewer's eyes. In addition, at lower viewing angles, there will still be enough of the surface of the patch in a non-reflective mode relative to the observer and the light source to give contrast to the relatively bright and reflective intaglio ink.

The intaglio ink used for printing the image should have a hue chroma value tending towards saturation: 60 chroma units. While the minimum chroma value

should be about 30 chroma units, a practical chroma value to achieve best results will be at least 50 chroma units, which is relatively close to saturation. The lightness of the ink should similarly be greater than 50 L degrees, and the lightness will typically be of the order of 70 to 100 L degrees.

5 An appropriate lightness value can be achieved in an ink having the required hue and chroma values by the addition of a lightening agent such as TiO_2 to the ink. The amount of TiO_2 added to the ink will depend on the hue of the ink which is selected, and may vary from about 3% to about 10%.

10 The effects described above and below can be achieved to a certain extent by using pure colours in the intaglio inks, preferably hues located in the $L^*a^*b^*$ colour space quadrant as defined by Commission Internationale de l'Eclairage in 1976. However, for best results, the TiO_2 addition described above improves the opacity of the printed image sufficiently to hide the reflective patch and provides additional reflectance so as to be readily observable when the metallic reflective patch is
15 viewed beyond the 40 degree window illustrated in Figure 4. The addition of titanium dioxide, in the preferred embodiment to 4% at the expense of the filler calcium carbonate, the above criteria of opacity and reflective specifications are achieved without losing any lightness or hue saturation. The increased reflectance of such enhanced intaglio inks allow the intaglio image to be clearly observable at
20 an angle other than the viewing window of the reflective patch.

Brief Description of the Drawings

A preferred embodiment of the invention will now be described with reference to the accompanying drawings in which:

25 Figures 1 to 3 show schematically the manner in which the security document or other device embodying the invention functions; and

Figure 4 is a sectional elevation of part of a security document embodying the invention illustrating a preferred example,

Description Of The Preferred Embodiments

30 In the preferred embodiments, metallic ink patches 1 are printed by the gravure printing process onto a smooth polymer substrate 2, such as any one of the substrates currently used in the production of polymer banknotes in Australia and

overseas. The following preferred ink formulations and gravure engraving specifications will produce acceptable results.

To achieve the highly reflective surface, two systems (silver and gold) can be used. The formulations and gravure engraving specifications are as follows:

5 Silver coloured reflective patch.

Eckart Aluminium (PCA)-18% Syloid 308-0.5-1.0%
Resin (two pack polyurethane system)-35% Catalyst-5.3%
MIBK-3%

Add Ethyl Acetate to achieve a printing viscosity of 21-23secs. using Zahn cup No.

10 2

Gold coloured reflective patch.

Eckart Gold (Rotoflex, Resist Grade Rich Pale Gold)-31%
Resin (two pack polyurethane system)-29% MIBK-3%
Syloid 308-0.5-1.0% Catalyst-4.4%

15 Add Ethyl Acetate to achieve a printing viscosity of 21-23secs. using Zahn cup No.
2

The cylinder configuration used for these pigments is:

Wall = 10 μm Width = 200.1838 μm
Channel = 36 μm Cell Depth = 57.78807 μm

20 Lines/cm = 59 μm Stylus = 120°

Screen = 41.2 μm

To measure the specular reflectance, in percent (R_s), of these metallic surfaces, the following equation can be used:

R_s (percent) =

$$50 \left[\left(\frac{\cos i - \sqrt{n^2 - \sin^2 i}}{\cos i + \sqrt{n^2 - \sin^2 i}} \right)^2 + \left(\frac{n^2 \cos i - \sqrt{n^2 - \sin^2 i}}{n^2 \cos i + \sqrt{n^2 - \sin^2 i}} \right)^2 \right]$$

where:

i = the specular (incidence) angle, and
 n = the index of refraction of the surface.

25

This formula can be found in ASTM Standard D 2457 - 97, Standard Test Method for Specular Gloss of Plastic Films and Solid Plastics

A suitable instrument is the Micro-Tri-Gloss Meter which uses the above methodology to measure gloss units. The results are related to a highly polished black surface with a refractive index of 1.567.

Below are typical measurements for different substrates measured at a 45° angle:

Matt white paper -	= 5.4
Opacified "Guardian substrate™"	= 10.1
Metallic Silver ink (on paper)	= 20.4
Silver on Opacified "Guardian substrate™"	= 102.3

Note: At a 45° angle, a perfect mirror measures 1000.

With Matt white paper, the light is reflected in the direction of specular reflection as well as other directions. The capacity of a surface to reflect a light source is significantly reduced. With opacified substrate, the surface is flatter and smoother however the light source is still reflected specularly. The metallic ink on paper is slightly better but the rougher surface still affects the reflective properties of the ink. On the other hand, the metallic ink on opacified "Guardian substrate™" is more reflective. The intensity of the reflected light is dependent on the angle of illumination and material properties.

A printed image 3 is applied to the reflective patch by means of the intaglio printing process using an ink having selected colour chroma values and lightness. Preferred ink formulations are detailed below in comparison with standard formulations of similar hues.

To make up 100 units of intaglio ink the formulation is as follows:

Enhanced Formulation		Standard Formulation	
25 Polyester resin -	36	Polyester resin -	36
Polyethylene wax -	5	Polyethylene wax -	5
Wax -	5	Wax -	5
Calcium Carbonate -	30	Calcium Carbonate -	34
Hydrocarbon Solvents-	8	Hydrocarbon Solvents-	8
30 Drier -	1	Drier -	1

CIBA Yellow, 2GLTE- 11
TiO₂ - 4

CIBA Yellow, 2GLTE- 11

L = 83.52, a = -1.00, b = 4.56

L = 82.11, a = -4.59, b = 28.32

5

Formulation for another intaglio ink colour is as follows:

Polyester resin -	36	Polyester resin -	36
Polyethylene wax -	5	Polyethylene wax -	5
Wax -	5	Wax -	5
10 Calcium Carbonate -	30	Calcium Carbonate -	34
Hydrocarbon Solvents-	8	Hydrocarbon Solvents-	8
Drier -	1	Drier -	1
CIBA Green GLN-	11	CIBA Green GLN -	11
TiO ₂ -	4		

15

L = 79.37, a = -6.97, b = 5.21

L = 66.99, a = -22.57, b = 9.12

20

The addition of TiO₂ to the intaglio ink formulation increases reflectivity, while maintaining the opacity of the ink film. Indeed, the white (TiO₂) on its own, also produces a colour shift, just as effective as coloured pigments, and may therefore replace the pigment component in the above examples.

25

30

The desired effect is not as effective if there is less than 5 μm of intaglio ink, and this is the reason why intaglio or similar inks must be used rather than offset inks. The image should include a matrix of lines or dots 4, such as a portrait, a numeral, or a latent image. The height of the intaglio ink achieves two things: it ensures the opacity of the ink film and therefore no reflective ink from underneath the intaglio patch is viewable through the encased ink, and the height allows less of the intaglio patch to be viewed as the document is rotated with respect to the light source. The example of Figure 4, the height of the ink is about 10 μm while the spacing between adjacent lines or dots 4 is about 30 μm giving a height to pitch ratio of 1:3 when the viewing angle is about 33.69°, as illustrated by the first arrow, the patch 1 is halved, while at an angle of 21.8°, the patch 1 disappears.

When the intaglio ink is printed on the reflective patch, as illustrated in Figure 4 and the patch is viewed at an angle perpendicular to the light source, as illustrated in Figure 1, the viewer will see two distinct colours, that of the highly reflective metallic patch, and the relatively pure colour of the intaglio ink. As the viewing angle is slowly changed as illustrated in Figures 2 and 3, from a perpendicular angle to a more oblique angle relative to the light source, the reflective metallic patch becomes duller, due to it being less reflective at that angle, and the intaglio pigment becomes brighter and more enhanced.

The substrate incorporating the reflective patch and enhanced intaglio ink must be capable of withstanding the rigours of physical wear and tear such as crumpling, soiling and abrasion, chemical attack such as mild caustic, water, dry cleaning and perspiration and finally, have very good light fastness over an extended period of time, comparable to the document's life.

CLAIMS

1. A security document or device including a substrate, a smooth highly reflective layer applied to said substrate and having a reflectivity of at least 60 gloss units, and a raised printed image applied to said reflective layer by a printing process, at least part of said raised printed image having a height of at least 10 μm , said printed image being printed using ink of a hue having a chroma value of at least 30 chroma units and/or a lightness of at least 50 lightness units.
2. The security document or device of claim 1 wherein the raised printed image includes lines or dots which have an average height of about 10 μm to 100 μm , and has a similar width, and the spacing or pitch between adjacent lines or dots is in a ratio height to pitch of about 1:1 to 1:3.
3. The security document or device of claim 2, wherein the raised printed image has an average height of almost 20 to 40 μm , and a typical average height of about 30 μm .
4. The security document or device of any preceding claim, wherein the hue chroma value of the ink used to print the printed image tends towards a saturation value of 60 chroma units, the minimum chroma value being at least 30 chroma units and a typical value of about 50 chroma units, the lightness of the ink being greater than 50 L degrees (lightness units), and typically between about 70 and 100 L degrees.
5. The security document or device of any preceding claim, wherein the smooth highly reflective layer is restricted to a small region or patch of the substrate to thereby define a specific security feature in the document or device.
6. The security document or device of any preceding claim, wherein the smooth highly reflective layer is applied to the substrate by printing.

7. The security document or device of claim 6, wherein the substrate is a plastics film capable of use to form a bank note, and the smooth highly reflective layer is applied directly to the substrate to utilise the reflective properties of the film.

5

8. The security document or device of claim 6, wherein the substrate is a plastics film capable of use to form a bank note, the smooth highly reflective layer being applied over an opaque ink layer applied to the surface of the substrate.

10

9. The security document or device of claim 6, wherein the substrate is a paper film having a smooth surface to which said smooth highly reflective layer is applied.

15

10. The security document or device of claim 6, 7, 8 or 9, wherein the smooth highly reflective layer is applied to the substrate by a Gravure printing process.

11. The security document or device of any preceding claim, wherein the raised printed image is applied by an Intaglio printing process.

20






12. The security document or device of any one of claims 6 to 11, wherein the smooth highly reflective layer has a layer thickness of about 3 μm .

25

13. A method of producing a security document or device, including the steps of applying a smooth highly reflective layer to a substrate, said reflective layer having a reflectivity of at least 60 gloss units, and printing a raised printed image on the reflective layer, at least part of said raised printed having a height of at least 10 μm and being printed using ink of a hue having a chroma value of at least 30 chroma units and/or lightness of at least 50 L degrees

30

14. The method of claim 13, said steps being modified to produce a document or device as claimed in any one of claims 2 to 12.

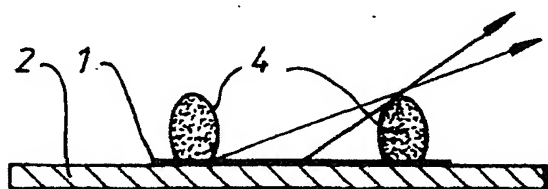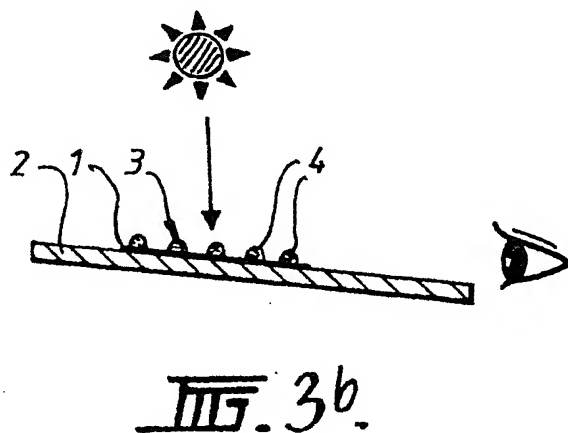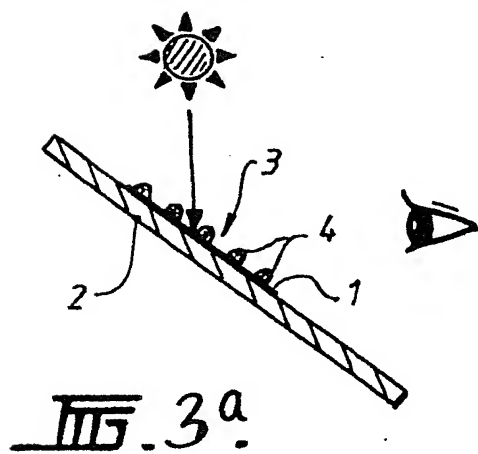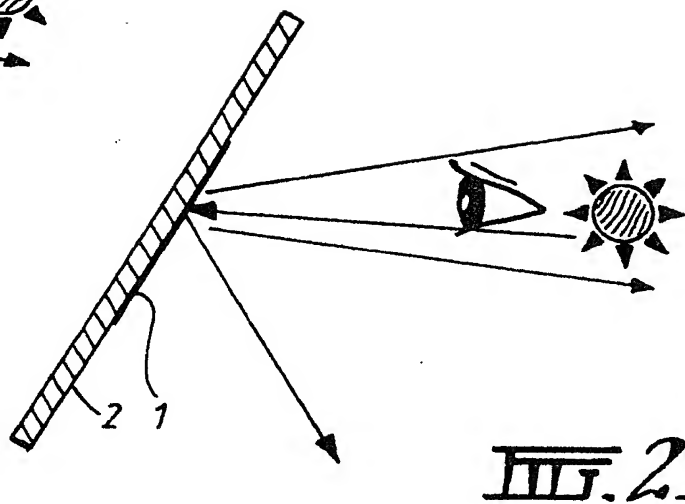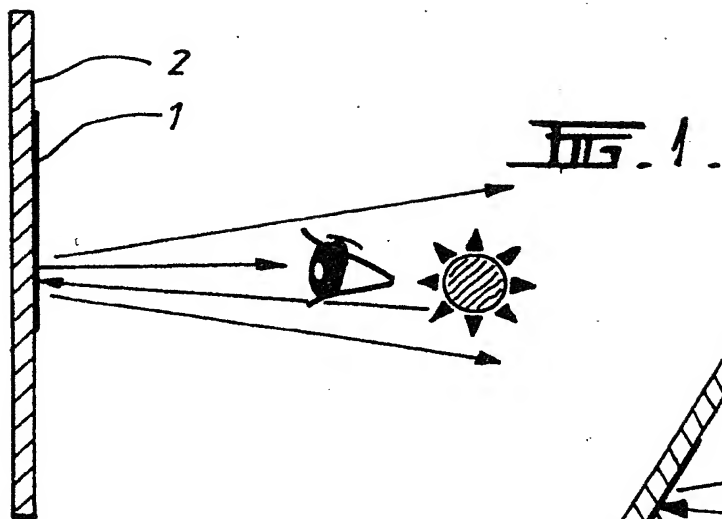

INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU00/00629

A. CLASSIFICATION OF SUBJECT MATTERInt. Cl. ⁷: B44F 1/12, B42D 15/10, 105:00, B41M 3/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B44F 1/08, 1/12, B42D 15/10, 105:00, 211:00, B41M 3/14, G02B 5/02

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPAT (reflect+, gloss+, metal+, smooth+, bright+, ink, intaglio, print+, gravure, bank:, securit+, money?, cheque?, check?, note?)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	AU 57410/98 A (SECURENCY PTY LTD) 25 August 1998 See whole document	1-14
A	US 4420515 A (AMON et al) 13 December 1983 See whole document	1-14
A	AU 38653/93 A (DIRECTOR GENERAL, PRINTING BUREAU, MINISTRY OF FINANCE, JAPAN) 9 December 1993 See abstract and figures	1-14

☒ Further documents are listed in the continuation of Box C ☒ See patent family annex

* Special categories of cited documents:

"A" document defining the general state of the art which is

not considered to be of particular relevance

"E" earlier application or patent but published on or after

the international filing date

"L" document which may throw doubts on priority claim(s)

or which is cited to establish the publication date of

"O" another citation or other special reason (as specified)

document referring to an oral disclosure, use,

exhibition or other means

"P" document published prior to the international filing

date but later than the priority date claimed

"T"

later document published after the international filing date or

priority date and not in conflict with the application but cited to

"X"

understand the principle or theory underlying the invention

document of particular relevance; the claimed invention cannot

be considered novel or cannot be considered to involve an

inventive step when the document is taken alone

"Y"

document of particular relevance; the claimed invention cannot

be considered to involve an inventive step when the document is

combined with one or more other such documents, such

combination being obvious to a person skilled in the art

"&"

document member of the same patent family

Date of the actual completion of the international search

15 June 2000

Date of mailing of the international search report

27 JUN 2000

Name and mailing address of the ISA/AU

AUSTRALIAN PATENT OFFICE

PO BOX 200, WODEN ACT 2606, AUSTRALIA

E-mail address: pct@ipaustalia.gov.au

Facsimile No. (02) 6285 3929

Authorized officer

STEPHEN CLARK

Telephone No : (02) 6283 2164

INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU00/00629

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 4226907 A (BASF MAGNETICS GmbH) 17 February 1994 See abstract	1-14
A	Derwent Abstract Accession No. 92-019203/03, Class P75, JP 03-266684 A (OKURASHO INSATSUKYO) 27 November 1991	1-14
A	Derwent Abstract Accession No. 95-144406/19, Class G05, JP 07-068981 A (KYODO PRINTING CO LTD) 14 March 1995	1-14

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/AU00/00629

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report			Patent Family Member				
AU	57410/98	WO	98/33658	BR	9806143	ZA	9800737
US	4420515	NONE					
AU	38653/93	CA	2095971	EP	581414	JP	5339900
		US	5437897	US	5582103		
DE	4226907	CN	1085325	WO	94/04366	ZA	9305913
JP	07-068981	NONE					
JP	03-266684	NONE					
END OF ANNEX							

